

QUALITY, PERFORMANCE AND DEPENDABILITY FOR OVER 60 YEARS

BUTLER PRODUCTS

ENFORCER LANDING GEAR

FEATURES

High Quality and Durability

50,000 lb. Capacity

Precision Forged 2-Speed Gearbox

Available in Standard Mount Orientations

Crank Handle and Connecting Shaft
Included with Ordered Pairs

Meets or Exceeds TTMA and AAR
Certifications and Recommendations

Cold Weather Packages Available

High Viscosity and Lubricity Grease



ENFORCER 31 SERIES LANDING GEAR

KEY PRODUCT FEATURES

MATERIAL

Outer: 5.31" x 5.31" Square Tubing
 Inner: 4.8" x 4.8" Square Tubing

GEAR BOX

Internal 2-Speed

SAND SHOE

HD 10" x 9.5" Steel
 Cushion Foot Option Available

CRANK RATIO

Low Gear: 36 Cranks/Inch
 High Gear: 4 Cranks/Inch

OPERATIONAL LENGTHS

Extended: 53 in.
 Retracted: 34 in.
 Lift: ? inches

LOAD CAPACITY

Static Load: 200,000 lbs.
 Lift Capacity: 66,000 lbs.

PERMANENT LUBRICATION

Jackscrew: High Viscosity
 and Lubricity Grease
 Gears: High Viscosity
 and Lubricity Grease

MOUNTING

Standard & Universal:
 10-Bolt (Standard TTMA Pattern)

FINISH


Standard: Flat Black
 Specialized Coatings Available

WEIGHT

Per Pair: 209 lbs.

ADDITIONAL

Crank Handle and
 Connecting Shaft Included

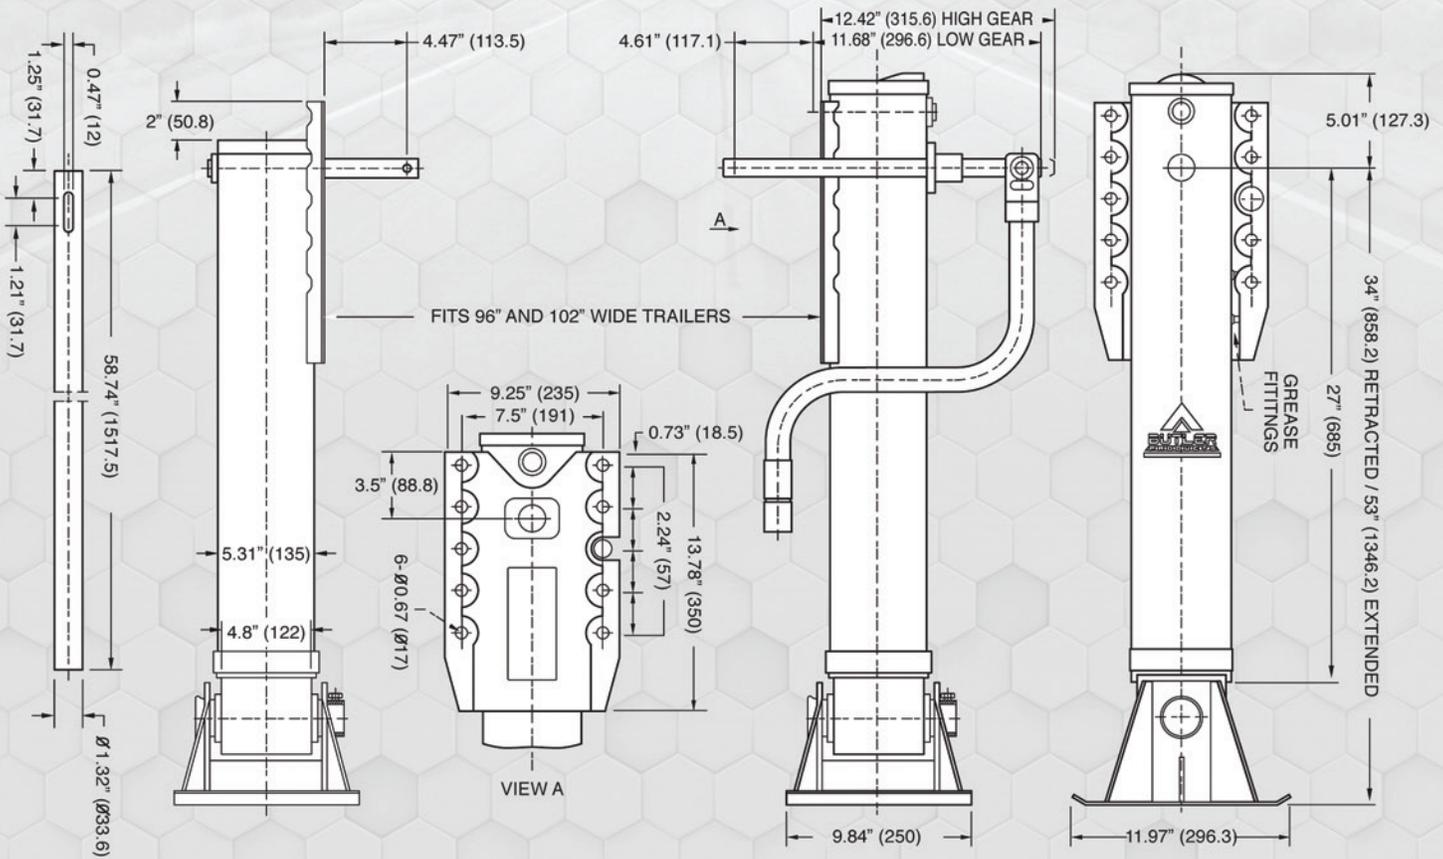

OX INDUSTRIES



OX-IND.COM